


Figure 3 – Installation Drawings



- Any coating deterioration due to a cleaning material containing the acidic or corrosive agent.
- In case of outdated delay of guarantee or falsification on the certificate of guarantee.
- Any damage and any dysfunctions emerging from use outside.
- Any dysfunctions caused by a maintenance or repair made by none permitted persons.
- Any deterioration and other damages caused by any long-term stocking in a construction site.
- Any dysfunctions caused by troubles emerging from an installation of conduit and of fittings.
- Any dysfunctions caused by an incompatible use of the product concerning the normal operation pressure between 0.5 and 10 Bars.
- Any damage which could result from the water temperatures of network or of ambient air not between 5°C and 80°C.
- Any deterioration due to a corrosive atmosphere: deficient aeration, steam with chemical agents or other aggressive products.

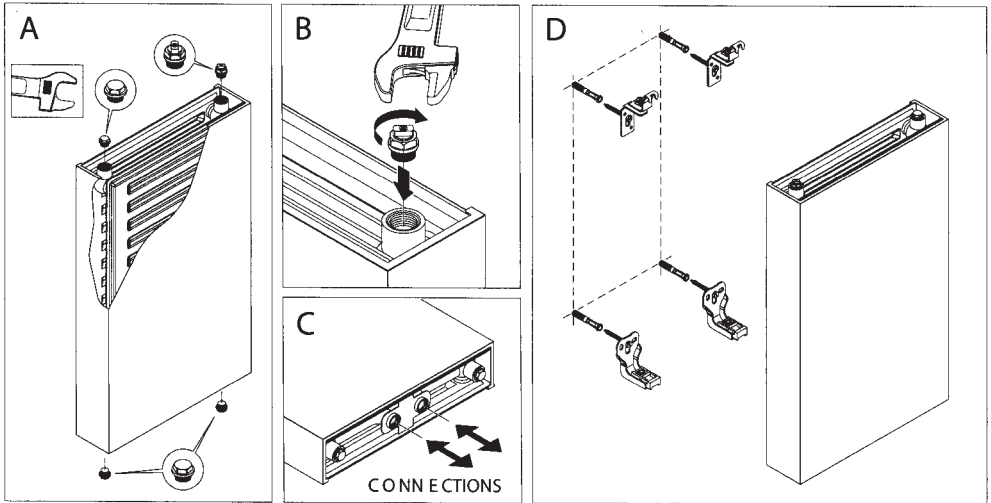